


Specs	Info
Model	MK1 HH24
Fretboard Side Inlay	Luminary
Fret Wire	Stewmac #9-23 Green
Bridge	Hardtail Gotoh GTC-102
Machine Heads	6 Inline (RV) Gotoh SG-381-B
Nut	Tusq Fender Spacing
Vol Pot	500k ohm Gotoh Push/Pull Coil Split (A curve)
Tone Pot	500k ohm Gotoh
Toggle Switch	3 Way Gotoh
Output Jack	Long Shaft Switchcraft Stereo
Knobs	Dome Gotoh VK-18-18
Truss Rod	2 Way ALS Low Profile
Truss Rod Cover	Plastic Spearhead
Truss Rod Cover Screw	Brass 10mm
Carbon Rods	Stewmac #4403
Neck Screws	FRM M5 High Carbon Steel Hex Head
Neck Inserts	Granger Brass
Neck Ferrules	Stewmac 15mm Countersunk #4184-B
Pickup Screws	FRM M2 Stainless Steel Countersunk
Pickup Inserts	Brass M2 10mm
String Through Ferrules	Gotoh TLB-1-B
Strap Locks	Schaller
Control Cavity Mounting	FRM M2 Knurled Brass M2 10mm

Critical Measurements	mm	Deg	Bit Size	Bit Type
Nut Width	43			
Heel Width @ 24th Fret	57.2			
Pocket Depth	17.79			
Scale Length	647.7			
Nut to Bridge Face	637.6			
Body Thickness	38			
Headstock Angle		6.6		
Control Wall Thickness	4			
Neck Heel Thickness	26			
Neck Pup Depth	21			
Bridge Pup Depth	21			
Neck at 2nd and 12th	19.2			
Output Jack Shaft	12.7	1/2"		
Vol / Tone Pot Shaft	9.5	3/8"	Brad Point	
Toggle Switch Shaft	11.6	1/2mm		
Machine Head Shaft	10	10mm		
Machine Screw Dia	2.1			
Machine Screw Depth	10			
Neck Brass Ins Dia	8.2	7mm or 17/64"	Brad Point	
Neck Brass Ins Depth	10	7mm or 17/64"	Brad Point	
Neck Mount Ferrule Dia	12	12mm	Forstner	
Neck Mount Ferrule Depth	4.2	12mm	Forstner	
Neck/Body Screw Hole	5	5mm	Brad Point	
String Ferrules Dia	8.3	8mm	Brad Point	
String Ferrules Depth	7.7	8mm	Brad Point	
String Ferrule Internal	3	3mm	Brad Point	
Truss Rod Width	6.2 (0.244")	6.25mm	Straight Cut	
Truss Rod Depth	9.2 (0.365")	6.25mm	Straight Cut	
Carbon Rod Width	6.35 (0.250)	1/4"	Straight Cut	
Carbon Rod Depth	5.08 (0.200)	1/4"	Straight Cut	
Nut to Bridge Screw	641.7			

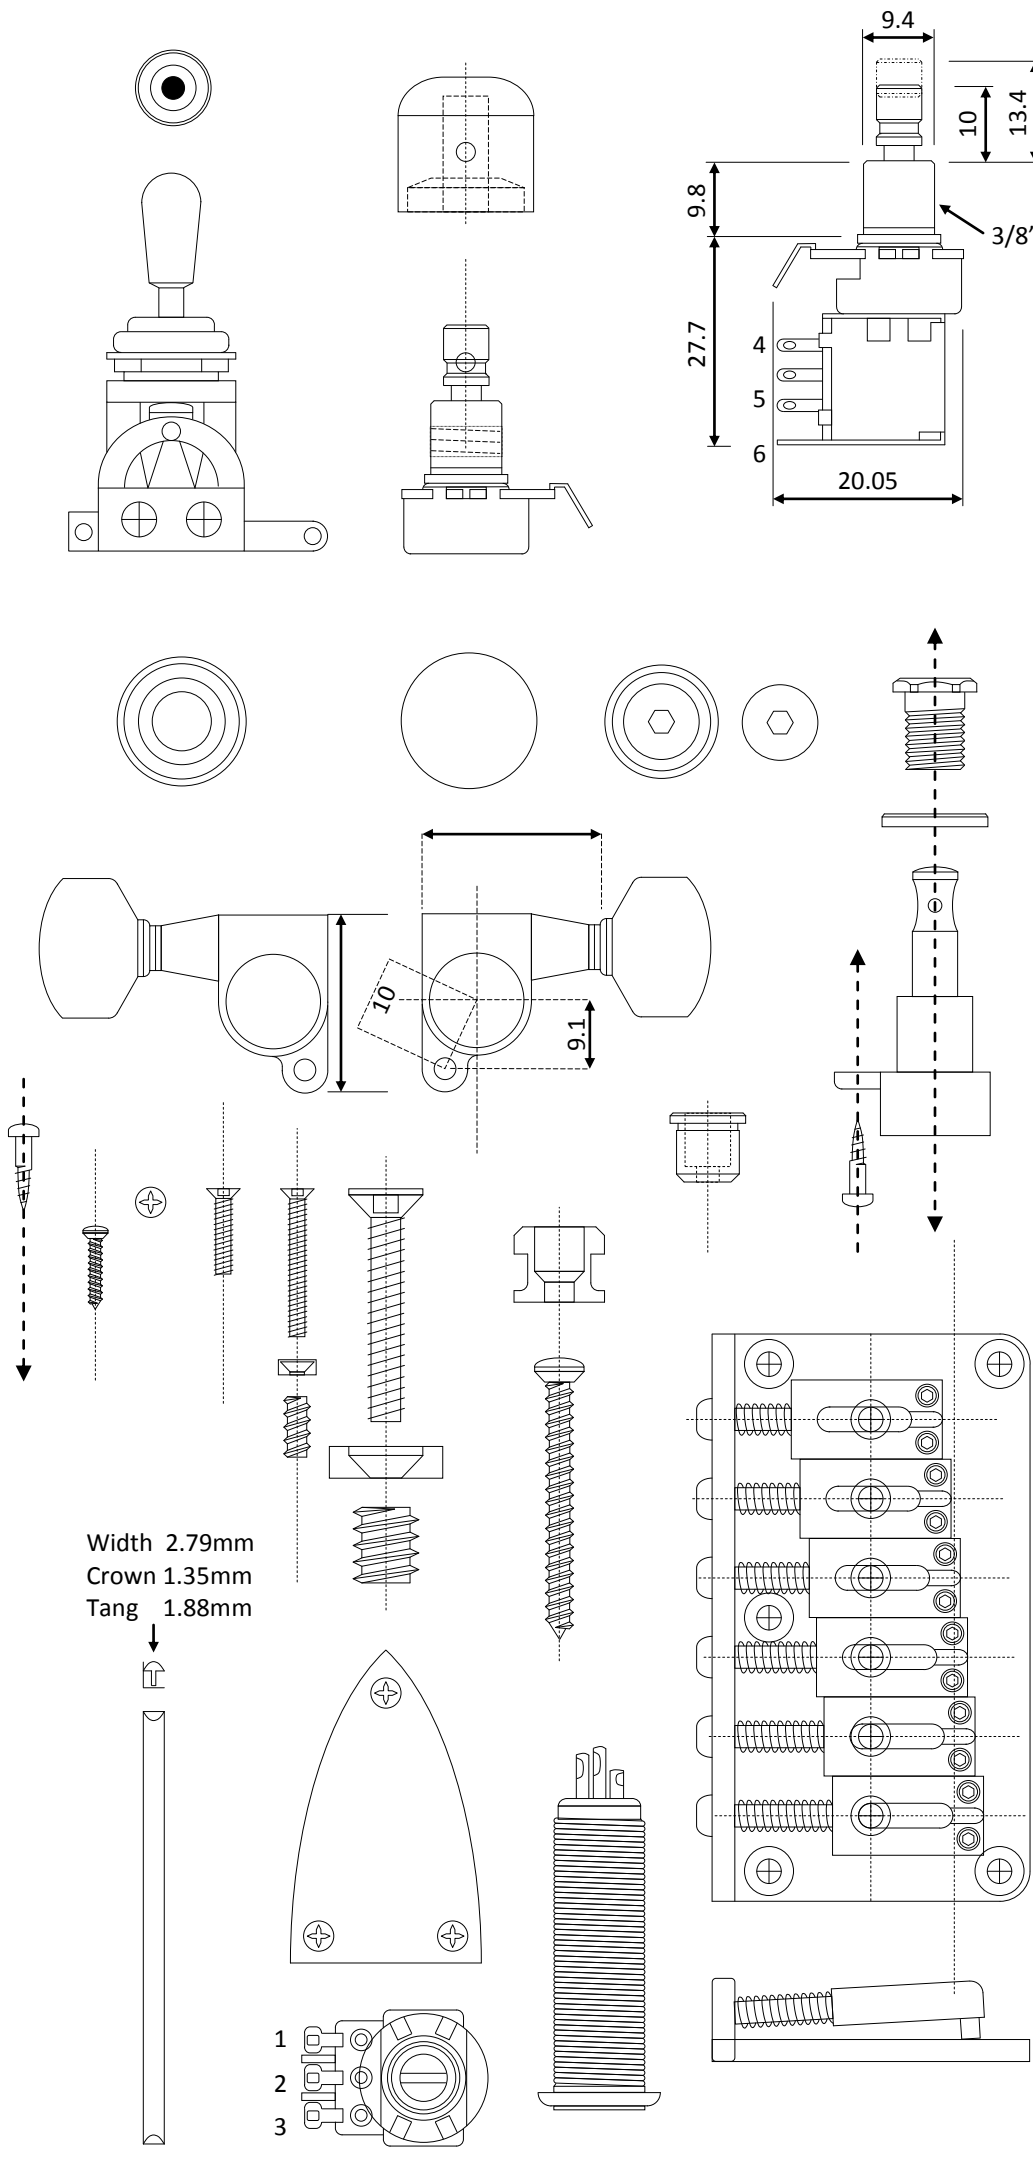

Fret	From Nut	Fret to Fret
1	36.353mm	36.353mm (nut-1)
2	70.665mm	34.312mm (1-2)
3	103.051mm	32.386mm (2-3)
4	133.620mm	30.569mm (3-4)
5	162.473mm	28.853mm (4-5)
6	189.707mm	27.234mm (5-6)
7	215.412mm	25.705mm (6-7)
8	239.675mm	24.262mm (7-8)
9	262.575mm	22.901mm (8-9)
10	284.191mm	21.615mm (9-10)
11	304.593mm	20.402mm (10-11)
12*	323.855mm	19.257mm (11-12)
13	342.026mm	18.176mm (12-13)
14	359.182mm	17.156mm (13-14)
15	375.376mm	16.193mm (14-15)
16	390.660mm	15.284mm (15-16)
17	405.087mm	14.427mm (16-17)
18	418.703mm	13.617mm (17-18)
19	431.556mm	12.853mm (18-19)
20	443.687mm	12.131mm (19-20)
21	455.138mm	11.450mm (20-21)
22	465.945mm	10.808mm (21-22)
23	476.146mm	10.201mm (22-23)
24*	485.775mm	9.629mm (23-24)
25	494.863mm	9.088mm (24-25)